
Wooden-Land Timber Veneer

Classic Engineered Floors

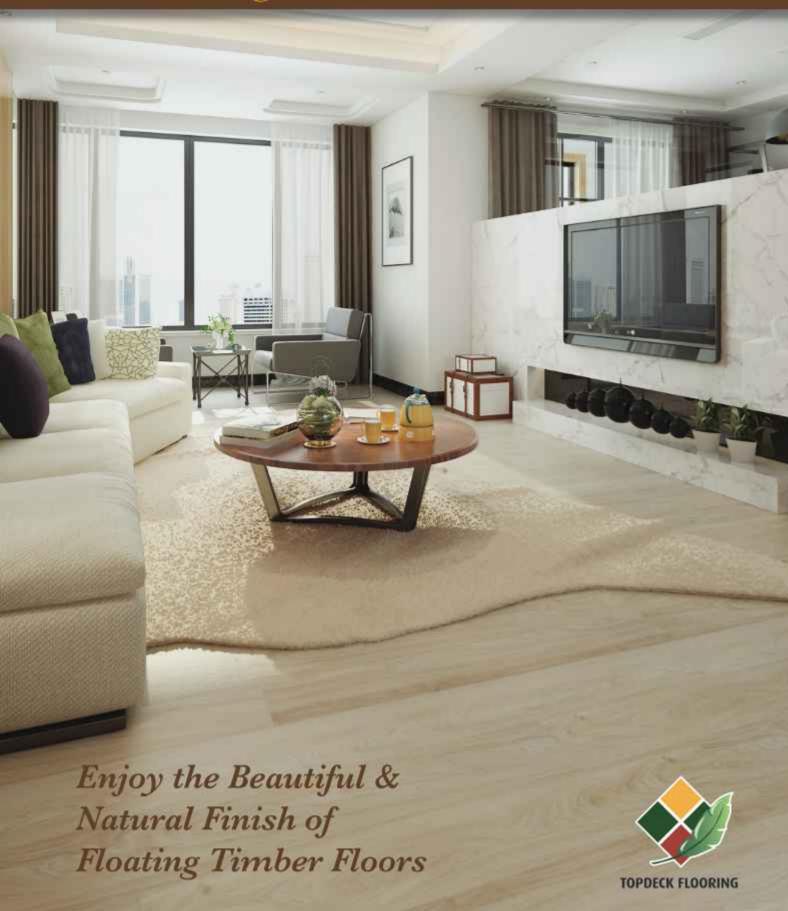

Wooden-Land Timber Veneer Classic Engineered Floors Floating timber floors are also known as timber veneer floors or engineered timber floors.

Floating floors are the cost effective alternative to solid timber floors. Floating timber flooring range: 3-6 mm thick pre-finished timber veneer.

- · Quick & easy to install
- · No staining or sticky finishes means less mess in your home
- Pre-finished coat, no sanding or lacquering required

5G Licensed Lock System



Dimensions: 1820-2200mm long X 136mm wide X 3/14mm thick OR 1820-2200mm long X 180mm wide X 3/14mm thick













Tongue & Groove System



Dimensions: 1820mm long X 122mm wide X 3/14mm thick









WOODEN-LAND TIMBER VENEER CLASSIC ENGINEERED FLOORS

TECHNICAL SPECIFICATIONS







quick and ea

tion maintenance

TYPE

Engineered Flooring, 3mm Timber Veneer on 11mm Plywood

GRADE & MANUFACTURING PROCESS

AB Grade

Contains Tight and Filled Knots and Natural Characteristics

COLOR COLLECTIONS

Blackbutt, Spotted Gum, Grey Ironbark, Sydney Blue Gum, Jarrah, Tasi Oak, Kempas, Pacific Blackbutt, Pacific Spotted Gum

LOCKING SYSTEM

5G Licensed Click Lock System Tongue & Groove System

COATING FINISH

9 Layers of Treffert Matt Lacquered Finish

FIRE RATING

CHF (Critical Heat Flux & Critical Radiant Flux) 3.8kw/m²

SLIP RATING

Slip Resistance Value (SRV): 28 (P2) as per Slip Resistance AS 4586 (2013)

ENVIRONMENTAL & QUALITY CERTIFICATES

VOC E1 ISO9000 Quality Control System and ISO14000 Environment Control System

STRUCTURAL WARRANTY

25 Years Residential; 5 Years Commercial

COATING WARRANTY

5 Years Residential; 3 Years Commercial

Combining quality & environmental control standards throughout the manufacturing process.









As timber is a natural product, the colour, grain and feature patterns will vary in the flooring as in the printed media.

For detail maintenance & installation guidelines please refer to the website.





